

Preset counters, electronic

LCD preset counters **1 preset – pulse, time (battery)** **901**



Type 901 is a simple battery-powered preset pulse counter/timer with 12 ... 250 V AC/DC count and reset inputs or with NPN input. The 6-digit, 2-line LCD display shows the current count value, the preset value, the relay state and the active time measurement.



Battery powered	AC/DC 12...250 V	max. 30 Hz	Temperature range -20°...+65°C	IP65	DIN front bezel DIN 48 x 48	Multifunctional	Plug-in screw terminal	Menu-driven programming	Decade key entry	Relay output

Powerful

- Count and reset input electrically separated from the counter: input switching levels 12 ... 250 V AC/DC or NPN input signal.
- 2-line LCD display for count and preset. Displays the switching status of the output and the active time measurement.
- Data retention thanks to exchangeable lithium batteries, battery life approx. 8 years.
- Output: relay, programmable as normally open or normally closed.

Simple

- Easy to programme.
- Simple preset entry; one key per decade.
- Plug-in screw terminals.
- Replacement for electromechanical preset counters.
- No external power supply necessary.
- Clock function.

Order no.

Type of input
12 ... 250 V AC/DC
NPN input

Order no.
6.901.010.820 ¹⁾
6.901.010.850 ¹⁾

Delivery specification

- Counter 901
- 2 lithium batteries
- 1 screw terminal
- 1 spring clip
- 1 operating instructions
- 1 front bezel for screw mounting, panel cut-out 50 x 50 mm [1.97 x 1.97"], T008860
- 1 front bezel for spring clip mount, panel cut-out 50 x 50 mm [1.97 x 1.97"], T008853
- 1 template for panel cut-out

1) Stock types.

Preset counters, electronic

LCD preset counters		1 preset – pulse, time (battery)	901
Accessories	Dimensions in mm [inch]		Order no.
Adapter front bezel, 72 x 72 [2.83 x 2.83]	for cut-out 68 x 68 [2.68 x 2.68] to cut-out 45 x 45 [1.77 x 1.77] (mating clip T009420 must be ordered separately)		black mating clip T008177 T009420
Adapter front bezel, ø 72 [2.83]	for cut-out ø 60 [2.36] to cut-out 45 x 45 [1.77 x 1.77] with clip mounting for counters 48 x 48 [1.89 x 1.89]		black N510226
Transparent cover, IP65	for cut-out 50 x 50 [1.97 x 1.97], with screw mounting for counters with cut-out 45 x 45 [1.77 x 1.77] and front bezel 48 x 48 [1.89 x 1.89]		lockable key lockable G008143 G008153
Sealing cover type K2, IP65	suitable for front bezel 75 x 60 [2.95 x 2.36] with screw mounting		transparent/black G008303
Mounting frame with cut-out 50 x 50 [2.36 x 2.36] via separate adapter also for 45 x 45 [1.77 x 1.77]	for snap-on mounting on 35 [1.38] top-hat DIN rail, for counters 48 x 48 [1.89 x 1.89], 53 x 53 [2.09 x 2.09] and 55 x 55 [2.17 x 2.17]		chromated G300003
Gaskets	60 x 75 [2.36 x 2.95] for cut-out 50 x 50 [1.97 x 1.97] 58 x 58 [2.28 x 2.28] for cut-out 50 x 50 [1.97 x 1.97]		N511020 N511004
Replacement parts			Order no.
7-pin connector	1 ... 7, pitch 5.08		N100548

Suitable gaskets, other accessories and installation examples for optional accessories can be found in chapter Accessories or in the Accessories section under: www.kuebler.com/accessories.

Technical data	
General technical data	
Display	2 line LCD display, 6 digits 999999; 7 or 4.5 mm [0.28 or 0.18"] high
Operating temperature	-20°C ... +65°C [-4°F ... +149°F] (non-condensing)
Storage temperature	-25°C ... +70°C [-13°F ... +158°F]
Altitude	up to 2000 m [6562']
Electrical characteristics	
Power supply	2 pcs user exchangeable lithium-batteries type 1/2 AA lithium 3.6 V
Data retention	min. 8 years at 5 x 10 ⁶ power operations of the output relay and an operating temperature of 25°C [+104°F]
EMC standards	EN 55011 class B EN 61000-6-2, EN 61000-6-3, EN 61326-1
Device safety	designed to protection class application area EN 61010-1, EN 61010-2-201 2 (front side) pollution level 2
UL approval	file E128604
Mechanical characteristics	
Protection	IP65 (front side)
Weight	approx. 80 g
Inputs	
Inputs	reset, count and key lock inputs
Polarity of the inputs (for reset and count/start input)	12 ... 250 V AC/DC bidirectional optocoupler input NPN NPN input activated by transistor or contact
Keyboard lock input	connected to +3 V DC (terminal 1)
Min. pulse duration of the inputs	reset input 50 ms keyboard lock input 15 ms
Switching levels of the inputs	12 ... 250 V AC/DC LOW: < 1 V AC/DC HIGH: 12 ... 250 V AC/DC NPN LOW: 0 ... 0.8 V DC HIGH: 2.5 ... 5 V DC
Input frequency	max. 30 Hz
Input resistance	110 kΩ
Outputs	
Output	bistable relay with potential free contact (programmable as normally closed or normally opened contact)
Max. switching voltage	250 V AC / 30 V DC
Max. switching current	2 A
Max. switching capacity	60 VA / 30 W
Output response time	< 20 ms, max. 4 Hz
Insulation coordination	basic insulation

Preset counters, electronic

LCD preset counters

1 preset – pulse, time (battery)

901

Programming

The counter is programmed using the keys on the front. The user is guided by plain text on the display.

The following modes are programmable:

1. Function: pulse preset counter or preset timer
2. Count mode (adding or subtracting)
3. Output: permanent signal or timed signal in case of automatic repetition (loop)
4. Output (normally open or normally closed)
5. Timed signal duration (Delay) in case of automatic repetition
0.1 ... 99.9 seconds
6. Decimal point up to max. 5 decimal places (pulse counter)
or up to max. 2 decimal places (preset timer)
7. Time range for the preset timer: seconds minutes, hours

Function of the output

- Adding:
Relay is active, when actual value \geq preset
- Subtracting:
Relay is active, when actual value \leq 0

In case of automatic repetition, the output signal is a timed signal programmable in 100 ms steps from 0.1 to 99.9 seconds.

A colon is displayed on the lower display line when the relay is activated.


An indicator flashes at one-second intervals when timing is active.

Operating the counter


- Setting or resetting:
Press the red SET button or apply a pulse to the reset input to set the counter to zero in the adding mode or to the preset in the subtracting mode.
- Presetting:
The preset value is indicated on the lower row of digits. To set it, use the 6 presetting buttons assigned to each decade. The set value will be accepted with the next set or reset operation.
- Overflow and underflow:
In the adding mode the overflow is 999 999 to 0; in the subtracting mode it is 0 to 999 999. The output signal remains unaffected.
- Lo-bat-indicator:
When the battery charge is too low, Lo-bat appears in the lower display. This flashes on a two second cycle. When lo-bat is indicated, the battery should be changed as soon as possible. If the charge goes on decreasing, the device switches to (noFunc) "no function" mode and must be reprogrammed.
- Changing the battery:
The unit retains the programmed values if the batteries are replaced within 2 minutes. Otherwise, the device must be re-parameterized.
- Counting:
By means of positive pulses (12 ... 250 VAC) or by a NPN input pulse. Time counting remains active as long as the counter input is active (preset timer).

Terminal assignment 12 ... 250 V AC/DC

Pin	Inputs / outputs
1	+3 V DC for terminal 2
2	Keyboard lock-input
3	Relay contact
4	Relay contact
5	AC/DC optocoupler count input
6	AC/DC optocoupler reset input
7	Common AC/DC input for terminal 6 and 5




Example of connection 12 ... 250 V AC/DC

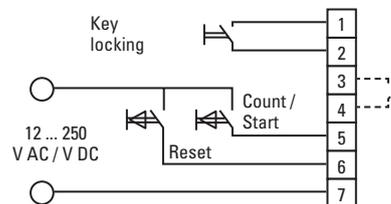


Terminal assignment NPN

Pin	Inputs / outputs
1	+3 V DC for terminal 2
2	Keyboard lock-input
3	Relay contact
4	Relay contact
5	NPN count/start input
6	NPN reset input
7	Common AC/DC input for terminal 6 and 5



Example of connection NPN

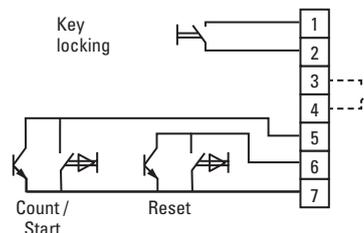


Preset counters, electronic

LCD preset counters	1 preset – pulse, time (battery)	901
----------------------------	-----------------------------------------	------------


Dimensions

Dimensions in mm [inch]

Panel cut-out 45 x 45 [1.77 x 1.77]

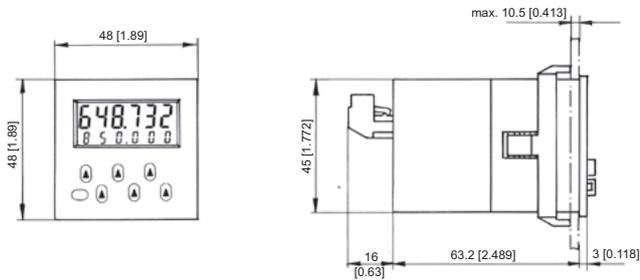

With front bezel 55 x 55 [2.17 x 2.17], panel cut-out 50 x 50 [1.97 x 1.97]

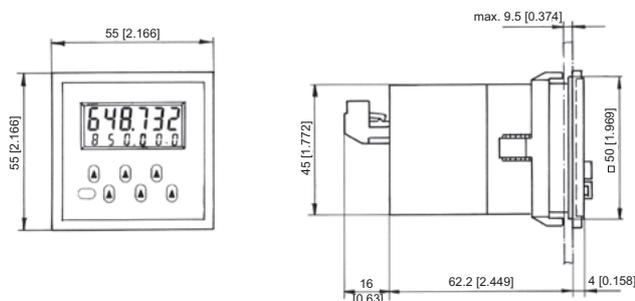

With front bezel 60 x 75 [2.36 x 2.95], panel cut-out 50 x 50 [1.97 x 1.97]

