

# Inclinometers

<b>Inclinometer MEMS / capacitive</b>	<b>IS60, 1-dimensional</b>	<b>CANopen</b>
---	----------------------------	----------------



With the IS60 inclinometer 1-dimensional inclinations in the measuring range 360° can be measured.  
The sensor has a standardized CANopen interface, which enables easy configuration and start-up. All the parameters are stored in the internal permanent memory.



High protection level



Shock / vibration resistant



Reverse polarity protection

### Robust and reliable

- Protection rating IP68/IP69k.
- Robust plastic housing.
- High shock resistance.

### User-friendly and accurate

- High resolution and accuracy.
- Programmable vibration suppression.
- High sampling rate and bandwidth.

### Order code Inclinometer IS60

**8.IS60** . **14523**  
Type      **a b c d e**


**Attention:**  
This is not a standard product. Delivery on request.  
Min. order quantity / frame order required.

- |   |                                      |                                   |   |  |
|---|--------------------------------------|-----------------------------------|---|--|
| <b>a</b> Measuring direction<br>1 = 1-dimensional | <b>b</b> Measuring range<br>4 = 360° | <b>c</b> Interface<br>5 = CANopen | <b>d</b> Power supply<br>2 = 10 ... 30 V DC | <b>e</b> Type of connection<br>3 = 2 x M12 connector |
|---|--------------------------------------|-----------------------------------|---|--|

Connection technology		Order no.
<b>Cordset, pre-assembled</b>	M12 female connector with coupling nut for Bus in, 5-pin 5 m [16.40'] PVC cable	<b>05.00.6021.2211.005M</b>
	M12 male connector with external thread for Bus out, 5-pin 5 m [16.40'] PVC cable	<b>05.00.6021.2411.005M</b>
<b>Connector, self-assembly (straight)</b>	M12 female connector with coupling nut for Bus in, 5-pin	<b>05.B-8151-0/9</b>
	M12 male connector with external thread for Bus out, 5-pin	<b>05.BS-8151-0/9</b>

Further accessories can be found in the accessories section or in the accessories area of our website at: [www.kuebler.com/accessories](http://www.kuebler.com/accessories)  
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: [www.kuebler.com/connection\\_technology](http://www.kuebler.com/connection_technology)

### Direction of inclination

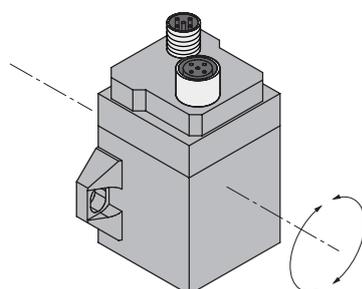

# Inclinometers

**Inclinometer  
MEMS / capacitive**

**IS60, 1-dimensional**

**CANopen**

## Technical data

### Mechanical characteristics

<b>Connection CAN</b>	M12 connector, 5-pin
<b>Weight</b>	approx. 0.2 kg [7.06 oz]
<b>Protection acc. to EN 60529</b>	IP68 / IP69k
<b>Working temperature range</b>	-40°C ... +80°C [-40°F ... +176°F]
<b>Material</b>	plastic PA12-GF30
<b>Shock resistance</b>	300 m/s <sup>2</sup> , 11 ms
<b>Vibration resistance</b>	100 m/s <sup>2</sup> , 10 ... 2000 Hz
<b>Dimensions</b>	68 x 42.5 x 42.5 mm [2.68 x 1.67 x 1.67"]

### Interface characteristics CANopen

<b>Interface</b>	CANopen according to CiA DS-301, Profile to CiA DSP-410
<b>Data rates</b>	10 kbit/s, 20 kbit/s, 50 kbit/s, 125 kbit/s, 250 kbit/s, 500 kbit/s, 800 kbit/s, 1 Mbit/s
<b>Functions</b>	TPDO (RTR, cyclic, event-driven, synchronized), parametrization per SDO and object register, digital filter (Butterworth Low pass, 8th order), SYNC Consumer, EMCY Producer, output and control of internal device temperature (±2.0 K accuracy), failure control with the help of Heartbeat or Nodeguarding / Lifeguarding

### General electrical characteristics

<b>Power supply</b>	10 ... 30 V DC
<b>Power consumption</b>	40 ... 105 mA
<b>Reverse polarity protection</b>	yes
<b>Measuring axes</b>	1
<b>Measuring range</b>	360°, no limit stop
<b>Resolution</b>	0.1°
<b>Linearity deviation</b>	max. ±0.4°
<b>Calibration accuracy (at 25°C)</b>	±0.1° (Zero point and final values)
<b>Temperature drift (Zero point)</b>	typ. ±0.008°/K
<b>Sampling rate</b>	100 Hz
<b>CE compliant acc. to</b>	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

A full description of the technical data can be found in the relevant product manual at [www.kuebler.com](http://www.kuebler.com).

## Terminal assignment

PIN	Signal	Assignment
1	CAN_SHLD	Shield
2	CAN V+	Supply voltage (+24 V DC)
3	CAN_GND	0 V
4	CAN_H	CAN_H Bus cable
5	CAN_L	CAN_L-Bus cable



## Dimensions

Dimensions in mm [inch]

