

Linear measuring technology

Incremental magnetic measurement system sensor head, magnetic band	Limes LI50 / B2	Resolution min. 5 µm
---	------------------------	-----------------------------



The non-contact incremental magnetic linear measurement system Limes LI50 / B2 - made up of the sensor head LI50 and of the magnetic band B2 - reaches a resolution up to 5 µm with a maximum distance of 2 mm between the sensor and the band.

For outdoor use with extremely sturdy aluminum housing and stainless-steel cover, wide temperature range as well as a UV-resistant cable. IP68 / IP69k protection, special encapsulation technology and tested resistance to cyclic humidity and damp heat offer the highest levels of reliability, even in exposed outdoor use.



 -20...+80°C Temperature range	 IP High protection level	 Shock / vibration resistant	 Reverse polarity protection
---	--	---------------------------------	---------------------------------

Robust

- Sturdy housing with IP67 protection.
Option: special housing for maximum resistance against condensation (IP68 / IP69k, resistance to cyclic humidity acc. to EN 60068-3-38 as well as damp heat acc. to EN 60068-3-78).
- Non-contact measuring system – free from wear.
- Masking tape protecting the magnetic band.

Easy installation

- Simple glued assembly of the magnetic tape.
- Large mounting tolerances.
- Requires very little installation space.
- Warning signals via status LED if the magnetic field is too weak.

Order code sensor head Limes LI50

8.LI50.X1X1.2XXX
Type a b c d e f

- a Model**
1 = IP67, standard
2 = IP68 / IP69k and humidity tested acc. to EN 60068-3-38, EN 60068-3-78
- b Pulse edge interval**
1 = standard

- c Output circuit / power supply**
1 = RS422 / 4.8 ... 26 V DC
2 = Push-pull / 4.8 ... 30 V DC
- d Type of connection**
1 = cable, 2 m [6.56'] PUR

- e Reference signal**
2 = index periodic
- f Code (resolution)¹⁾**
050 = 25 µm
250 = 5 µm

Stock types
8.LI50.1111.2050
8.LI50.1111.2250
8.LI50.1121.2050
8.LI50.1121.2250

Order code magnetic band Limes B2

8.B2.10.010.XXXX
Type a b

- a Width**
10 = 10 mm

- b Length**
- | | |
|------------|-------------|
| 0010 = 1 m | 0060 = 6 m |
| 0020 = 2 m | 0100 = 10 m |
| 0040 = 4 m | 0200 = 20 m |
| 0050 = 5 m | |

Optional on request
- other lengths up to 70 m

Stock types
8.B2.10.010.0020

1) With quadruple evaluation (only connected with magnetic band Limes B2)

Linear measuring technology

Incremental magnetic measurement system sensor head, magnetic band	Limes LI50 / B2	Resolution min. 5 µm
---	------------------------	-----------------------------

Accessories / display type 572		Order no.
Position display, 8-digit	with 4 fast switch outputs and serial interface	6.572.0116.D05
	with 4 fast switch outputs, serial interface and scalable analog output	6.572.0116.D95
Position display, 8-digit	with 4 fast switch outputs and serial interface	6.572.0118.D05
	with 4 fast switch outputs, serial interface and scalable analog output	6.572.0118.D95

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Technical data

Mechanical characteristics sensor head LI50		
Working temperature	-20°C ... +80°C [-4°F ... +176°F]	
Storage temperature	-20°C ... +80°C [-4°F ... +176°F]	
Shock resistance	5000 m/s ² , 1 ms	
Vibration resistance	300 m/s ² , 10 ... 2000 Hz	
Protection	model 1	IP67 acc. to EN 60529
	model 2	IP68 / IP69k acc. to EN 60529 and humidity tested acc. to EN 60068-3-38, EN 60068-3-78
Housing	aluminum	
Cable	2 m [6.56'] PUR 8 x 0.14 mm2 [AWG25] shielded, may be used in trailing cable installations	
Status LED	green	pulse-index error; speed too high or magnetic fields too weak (at 8.LI50.XXXX.X050 and 8.LI50.XXXX.X250)
	red	


Electrical characteristics sensor head LI50		
Output circuit	Push-pull	RS422
Power supply	4,8 ... 30 V DC	4,8 ... 26 V DC
Permissible load / channel	±20 mA	120 Ω
Max. cable length	max. 30 m [98.43']	RS422 standard
Power consumption (no load)	typ. 25 mA, max. 60 mA	
Short circuit proof ¹⁾	yes	yes ²⁾
Min. pulse edge interval	1 µs (corresponds to 4 µs/cycle see signal figures below)	
Output signal	A, \bar{A} , B, \bar{B} , 0, $\bar{0}$	
Reference signal	index periodical ³⁾	
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU	

Magnetic band Limes B2		
Pole gap	5 mm from pole to pole	
Dimensions	width	10 mm
	thickness	1,97 mm incl. masking tape
Temperature coefficient	16 x 10 ⁻⁶ /K	
Working temperature	-20°C ... +80°C [-4°F ... +176°F] ⁴⁾	
Mounting	adhesive joint	
Measuring	0.1 m (to receive an optimal result of measurement, the magnetic band should be ca. 0.1 m longer than the desired measuring length)	
Bending radius	≥ 150 mm (when mounted solely with adhesive tape)	
Material metal tape	precision steel strip 1.4310 acc. to EN 10088-3	

Accuracy	
Magnetic band	± (0,025 + 0,02 x L) mm – L in [m], up to L _{max} = 70 m
Sensor head	± 0,025 mm interpolation error accuracy: at T = 20°C and gap sensor head/magnetic band 1 mm
Repeat accuracy	±1 increment
Resolution and speed ⁵⁾	25 µm (quadruple), max. 16,25 m/s 5 µm (quadruple), max. 3,25 m/s


Permissible alignment tolerance (see draft „mounting tolerances“)	
Gap sensor head / magnetic band	0,1 ... 2,0 mm (recommended 1,0 mm)
Offset	max. ±1 mm
Tilting	max. 3°
Torsion	max. 3°

Function principle



Signal figures

- 8** Pulse edge interval: pay attention to the instructions in the technical data
- 9** Periodic index signal every 5 mm [0.20"]; the logical assignment A, B and 0-Signal can change



- 1) If power supply correctly applied.
- 2) Only one channel allowed to be shorted-out.
If +V = 5 V, short-circuit to channel, 0 V, or +V is permitted.
If +V = 5 ... 30 V, short-circuit to channel or 0 V is permitted.
- 3) At every pole change. The signal is generated by the sensor.
- 4) Magnetic band (ends) attached by screwing, clamping or equivalent.
- 5) At the listed rotational speed the min. pulse edge interval is 1 µs, this corresponds to 250 kHz. For the max. rotational speed range a counter with a count input frequency of not less than 250 kHz should be provided.

Linear measuring technology

Incremental magnetic measurement system sensor head, magnetic band	Limes LI50 / B2	Resolution min. 5 µm
---	------------------------	-----------------------------


Terminal assignment

Output circuit	Type of connection	Cable									
1, 2	1	Signal:	0 V	+V	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	\perp
		Core color:	WH	BN	GN	YE	GY	PK	BU	RD	shield ¹⁾

Dimensions


Dimensions in mm [inch]

Sensor head Limes LI50

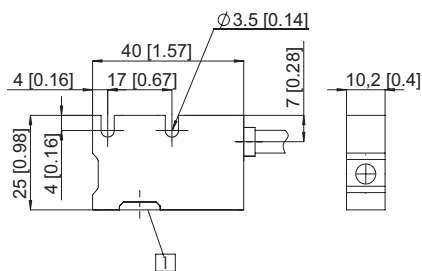

1 Active measuring area


Magnetic band Limes B2

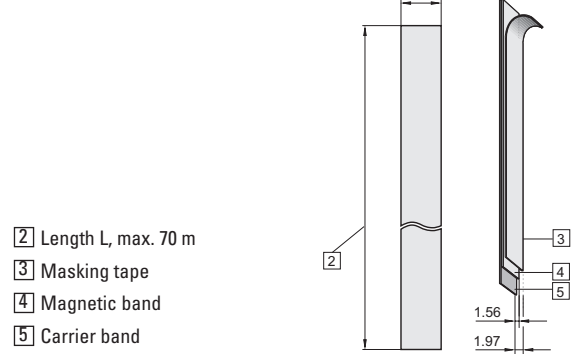

- 2 Length L, max. 70 m
- 3 Masking tape
- 4 Magnetic band
- 5 Carrier band


Permissible mounting tolerances

Tilting

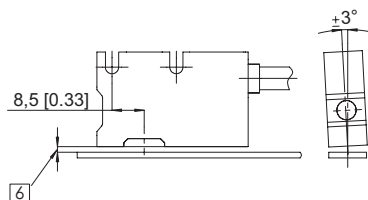

6 Distance sensor head / magnetic band:
0.1 ... 2.0 mm (recommended 1 mm)

Torsion



Offset



1) PH = Shield is attached to connector housing.